


MSC-3675

FULL SIZE PICMG BUS PENTIUM III
SLOT BOARD COMPUTER

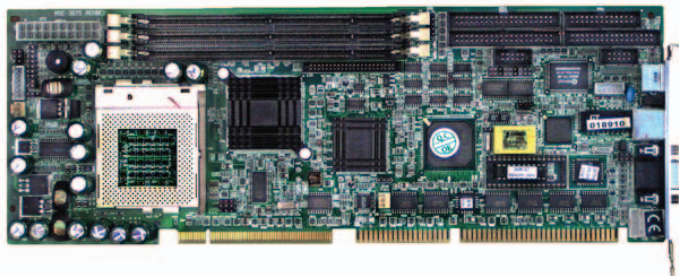

Specification

Processor	Intel Celeron / P III Processors, FSB (66/100 MHz)
CPU Speed	Up to 850 MHz
Chipset	Intel 440BX
BIOS	Award
Cache Size	Integrated in CPU
RAM Size	Up to 768 MB SDRAM
RAM Socket	168-Pin x 3
Bus	PICMG
Solid State Disk	Optional Disk-On-Chip
PC/104 Connector	N/A
On-board VGA	Flat Pannel / CRT
VGA Chipset	C&T 69000
VDRAM	2 MB
On-board Ethernet	10/100 Base-T
On-board SCSI	N/A
On-board Sound	N/A
FDD Support	2
HDD Support	4 x EIDE
Serial Port Com 1	RS232 x 1
Serial Port Com 2	RS-232/ 422/ 485 x 1
Parallet Port	1
PS/2 Port	Yes
USB Port	1.1 x 2
Watchdog Timer	Software Programmable
PCB Size	Full
PCB Dimension	338 (W) x 122 (D) mm

Features

- Intel Celeron or P III up to 850 MHz Processor
- Intel 440BX Chipset
- Up to 768MB SDRAM
- 2 MB VDRAM
- C & T 69000 Graphics Controller

Environmental Standard

Operation 0~60°C

Humidity 10~90% (Non-Condensing)

Approval CE, FCC, Class A

Order Information



MiTAC Incooperation
No. 187 Sec. 2 Tiding Blvd,
Neihu District Taipei City 114,
Taiwan (R.O.C.)

Tel: 886-2-2456 2255
Fax: 886-2-2456 9595
e-mail: icp@mitac.com.tw